




Product Specification

Grade T												
Size	Dimension						Mechanical properties					
	Ø Diameter d_n		Pitch (mm) p	Width		Weld diameter d_w max (mm)	Working load Limit max(t)	Proof test min(kN)	Minimum breaking force (kN)	Elongation Min (%)	Bend test Min (mm)	
	Min (mm)	Max (mm)		W_3	W_4							
				Max (mm)	Min (mm)							
6.00	5.64	6.12	18.00 ± 0.50	22.20	7.80	6.60	1.10	28.30	45.20	17%	4.80	
7.00	6.58	7.14	21.00 ± 0.60	25.90	9.10	7.70	1.50	38.50	61.60	17%	5.60	
8.00	7.52	8.16	24.00 ± 0.70	29.60	10.40	8.80	2.00	50.30	80.40	17%	6.40	
10.00	9.40	10.20	30.00 ± 0.90	37.00	13.00	11.00	3.20	78.50	126.00	17%	8.00	
13.00	12.22	13.26	39.00 ± 1.20	48.10	16.90	14.30	5.30	133.00	212.00	17%	10.40	
16.00	15.04	16.32	48.00 ± 1.40	59.20	20.80	17.60	8.00	201.00	322.00	17%	12.80	

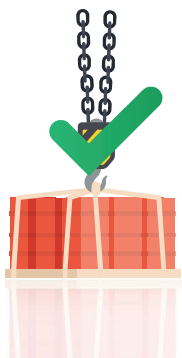

✓ CAN BE USED FOR OVERHEAD LIFTING

