




Product Specification

Grade V200											
Size	Dimension						Mechanical properties				
	Ø Diameter d_n		Pitch (mm)	Width		Weld diameter d_w	Working load	Proof test	Minimum breaking force (kN)	Elongation	Bend test
	Min (mm)	Max (mm)		W_1	W_3						
			p Max	Min (mm)	Max (mm)	max (mm)	Limit max(t)	min(kN)	force (kN)	Min (%)	Min (mm)
5.00	4.90	5.10	15.50	6.50	7.50	5.50	1.00	24.50	39.30	20%	4.00
6.00	5.90	6.10	18.50	7.80	9.00	6.60	1.40	35.30	56.50	20%	4.80
7.00	6.90	7.10	22.90	9.10	10.90	7.70	1.90	48.10	77.00	20%	5.60
8.00	7.90	8.10	26.40	10.40	12.70	8.80	2.50	62.80	101.00	20%	6.40
10.00	9.90	10.10	32.00	13.00	15.20	11.00	4.00	98.10	157.00	20%	8.00
13.00	12.90	13.10	41.60	16.90	19.50	14.30	6.70	166.00	265.00	20%	10.40
16.00	15.90	16.10	51.20	20.80	24.00	17.60	10.00	251.00	402.00	20%	12.80

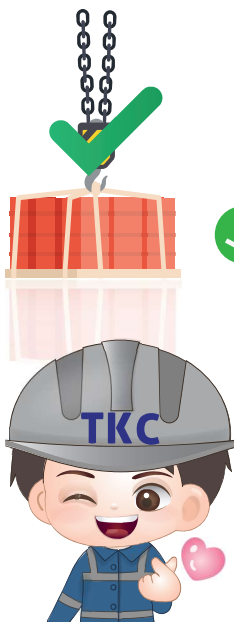

✓ CAN BE USED FOR OVERHEAD LIFTING

