




# Product Specification

Grade T Type T												
Size	Dimension						Mechanical properties					
	Ø Diameter $d_n$		Pitch (mm) $p$	Width		Dimension diameter $d_s$ max ( mm )	Working load Limit max( t )	Proof test min(kN)	Minimum breaking force (kN)	Elongation Min (%)	Surface hardness	
	Min (mm)	Max (mm)		$W_3$	$W_2$						$d_n < 7mm$ HV5, $d_n \geq 7mm$ HV10	
				Min (mm)	Max (mm)							
5.00	4.80	5.20	$15.00 \pm 0.30$	6.00	17.00	5.40	0.80	19.60	31.40	10%	360	
6.00	5.80	6.20	$18.00 \pm 0.35$	7.20	20.40	6.50	1.10	28.30	45.20	10%	360	
7.00	6.70	7.30	$21.00 \pm 0.40$	8.40	23.80	7.60	1.50	38.50	61.60	10%	360	
8.00	7.70	8.30	$24.00 \pm 0.50$	9.60	27.20	8.60	2.00	50.30	80.40	10%	360	
9.00	8.60	9.40	$27.00 \pm 0.50$	10.80	30.80	9.70	2.50	63.60	102.00	10%	360	
10.00	9.60	10.40	$30.00 \pm 0.60$	12.00	34.00	10.80	3.20	78.50	126.00	10%	360	
11.00	10.60	11.40	$33.00 \pm 0.60$	13.20	37.40	11.90	3.80	95.00	152.00	10%	360	
12.00	11.50	12.50	$36.00 \pm 0.70$	14.40	40.80	13.00	4.50	113.00	181.00	10%	360	
13.00	12.50	13.50	$39.00 \pm 0.80$	15.60	44.20	14.00	5.30	133.00	181.00	10%	360	
14.00	13.40	14.60	$42.00 \pm 0.80$	16.80	47.60	15.10	6.00	154.00	246.00	10%	360	
16.00	15.40	16.60	$48.00 \pm 0.90$	19.20	54.40	17.30	8.00	201.00	322.00	10%	360	

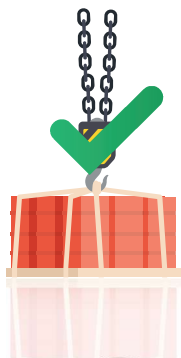

✓ CAN BE USED FOR OVERHEAD LIFTING

