




Product Specification

Grade T																	
Type DT, DAT								Mechanical properties									
Size	Surface hardened chain		Dimension						Working load Limit (t)	Manufacturing Proof force min(kN)	Breaking force min(kN)	Elongation min		Surface Hardness		Total case depth	
			Ø Diameter d		P (Pitch)	a	b	b _w				(%)	HV0.3 min		min (mm)		
			Min (mm)	Max (mm)	(mm)	min (mm)	max (mm)	max(mm)	DT/DAT	DT/DAT	DT/DAT	DT	DAT	DT	DAT	DT	DAT
5.00	DT-5.00	DAT-5.00	4.80	5.20	15.0 ^{+0.29} ₋₀	6.20	17.50	17.90	0.63	20.00	31.50						
5.60	DT-5.60	DAT-5.60	5.40	5.80	17.0 ^{+0.33} ₋₀	7.00	20.00	20.10	0.80	25.00	40.00						
6.30	DT-6.30	DAT-6.30	6.00	6.60	19.0 ^{+0.37} ₋₀	7.80	22.00	22.60	1.00	31.50	50.00						
7.10	DT-7.10	DAT-7.10	6.80	7.40	21.0 ^{+0.41} ₋₀	8.80	25.00	25.40	1.25	40.00	63.00						
8.00	DT-8.00	DAT-8.00	7.70	8.30	24.0 ^{+0.47} ₋₀	10.00	28.00	28.60	1.60	50.00	80.00	6%	10%	600	500	0.14	
9.00	DT-9.00	DAT-9.00	8.60	9.40	27.0 ^{+0.53} ₋₀	11.20	32.00	32.20	2.00	63.00	100.00						
10.00	DT-10.00	DAT-10.00	9.60	10.40	30.0 ^{+0.59} ₋₀	12.50	35.00	35.80	2.50	80.00	128.00						
11.20	DT-11.20	DAT-11.20	10.80	11.60	34.0 ^{+0.67} ₋₀	14.00	39.00	40.10	3.20	100.00	160.00						
12.50	DT-12.50	DAT-12.50	12.00	13.00	38.0 ^{+0.75} ₋₀	15.60	44.00	44.70	4.00	125.00	200.00						

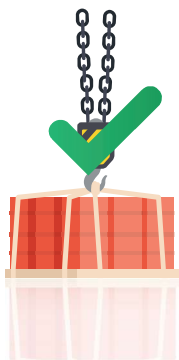

✓ CAN BE USED FOR OVERHEAD LIFTING

